I.L. WATSON B.E.(CIVIL), M.E., M.I.P.E.N.Z.
CONSULTING ENGINEER LTD.
SHARON ROAD
RD1 KAUKAPAKAPA
PH/FAX 09 420 5141
MOB 025 487 735

Rodney District Council
Private Bag
OREWA

20-07-99
Our Ref. J831
Council Ref:_____

Copy to:
Ray Nicklin
49 Remiger Road
PUHOI 1240

RE: EFFLUENT DISPOSAL SYSTEM FOR PROPOSED 1 BEDROOM ADDITION OVER EXISTING SHED FOR RAYMOND NICKLIN AT PT ALLOT 28 PSH OF PUHOI (SO 6988) 53 REMIGER ROAD, PUHOI.

We have visited the site and conducted soils investigations on the proposed effluent disposal area.

The site is on the South side of Remiger Road about 220 meters from the Road. The site of the shed, that is to be added to to form a 1 bedroom dwelling, slopes gently to the South West.

The soils consist of about 600mm of top soil over tight swelling clay material, the original topsoil layer of about 350mm has been increased to 600mm after excavations for the 2nd shed. We inspected the soils during heavy rain and found them to be of adequate permeability for standard soakage beds.

The site complies with ARC General Conditions for Domestic On Site Waste Disposal.

We therefore make the following recommendations:

1. The treatment system be a single chamber 2700*litre* septic tank fitted with an outlet filter eg. a Zabel or an upflow rock filter.

2. That the treated effluent be discharged to a 20 meter long standard soakage bed, constructed as per the details on drawing #3, in the position shown on drawings #1 and #2.

3. That all work be carried out by a registered drainlayer familiar with this treatment system.

The design of this system has been carried out in accordance with TP 58 and all work on site should therefore be carried out to this standard's requirements.

Yours Faithfully

Graham Smith for Ian L Watson

Encl.
Drawings
TP58 Report.

I.L. WATSON B.E.(CIVIL), M.E., M.I.P.E.N.Z.
CONSULTING ENGINEER LTD.
SHARON ROAD
RD1 KAUKAPAKAPA
PH/FAX 09 420 5141
MOB 025 487 735

ON-SITE WASTEWATER DISPOSAL SITE EVALUATION - SITE ASSESSMENT AND SUBSOIL INVESTIGATION CHECKLIST.

1.0 **Site Evaluator(s):**
Name: Graham Smith *Company Name:* I.L.Watson Engineering Ltd.
Address: 84 Sharon Road
Waitoki.

2.0 **Site Information:**
2.1 *Location Details:*
Locality: Puhoi
Owner: Raymond Nicklin
Address: 53 Remiger Road
Survey Plan Details: PT ALLOT 28 PSH OF PUHOI (SO 6988)
Local Authority Area: RDC
Regional Water Board Area: ARC

2.2 *Work Undertaken:*
Details: Site Visit, Soils investigation *Date:* 19-07-99 *Weather:* Wet

3.0 **Site Assessment:**
3.1 *Topography:*
Slope: Gentle to Flat *Ground Cover:* Grass
Geology: 600mm topsoil over tight clay.
Drainage Patterns: Refer to Site Plan Attached.
Available Clearances: Refer to Site Plan Attached.
Boundaries: *Wells, Bores:* *Waterways:*
Embankments: *Trees etc.:* *Buildings:*
Other:

3.2 *Is expert evaluation necessary?* No
If No, why not? There is no evidence of instability or likelihood of the proposed works causing instability.

If yes attach stability report and give details here of:
Author: *Designation:*
Company/Agency: *Date of Report:*

3.3 *Drainage Controls:*
Depth of Seasonal Watertable: *Winter:* 600mm *Summer:* Low
Need for Groundwater Cut-off Drains? No
Need for Surface Water Collector Drains? No, soakbeds at high point.

3.4 *Climate:*
Annual Rainfall: Typical Rodney

3.5 *Intended Water Supply Source:*

Rainwater:

3.6 *Local Experience: (Existing On Site Systems)*
Number of Systems in Locality: None

3.7 *Availability of Reserve/Buffer Areas:*
Reserve Areas Available for Extensions: 100 % of design area.
Buffer areas: 100 % of total site area.

4.0 **Subsoil Investigation:**

4.1 *Soil Profile Determination:*
Method: Test Pit
Reporting: Refer to covering letter.

4.2 *Percolation Testing:*
Carried out: No
Test Results: The soils were investigated in heavy rain and good sokage was evident.

4.3 *Estimated Soil Category:*

Soil Category	*Description:*
1	*Gravel, coarse sand; rapid draining.*
2	*Coarse to medium sand; free draining.*
3	*Medium fine and loam sand; good drainage*
4	*Sandy loam, loam, silt loam; moderate drainage.*
5	*Sandy clay-loam, clay-loam and silty clay-loam; moderate to slow drainage.*
6	*Sandy clay, non-swelling clay and silty clay; slow draining.*
7	*Swelling clay, grey clay, hard pan; non-draining.*

Reasons for placing in stated Category: Physical inspection.

5.0 **General Comments:**

5.1 *Need for Groundwater Quality Protection:* No

5.2 *Type of Disposal System Considered Best Suited to Site:* Standard Soakage Bed.

5.3 *Design Considerations:*

Any Specific Environmental Constraints? No.

Any specific Public Health Constraints? No.

5.4 *Other Comments:*

The proposed bed position is 30m from the river bank at the closest point. The owner of the property, who has lived there for many years, says that she has never seen the river reach the level of the proposed beds even in severe floods.

Signature: ..... *Date:* .....

PRIVACY ACT 1993


(1) Personal information obtained in this application is primarily for establishing applicant identity and, when the application has been granted or declined, for administration, monitoring and enforcement.

(2) The information may be released to any inquirer about the application, the refusal of the application, or in relation to the use of any consent or approval of the application.

(3) The information will be held by Rodney District Council, 50 Centreway Road, Orewa.

(4) The information will be used for verifying and amending the Council's ownership and occupier records (the Rating Roll) and will be released in accordance with the Rating Powers Act 1988 and to Valuation New Zealand.

(5) You have the right to access the information and to request its correction.

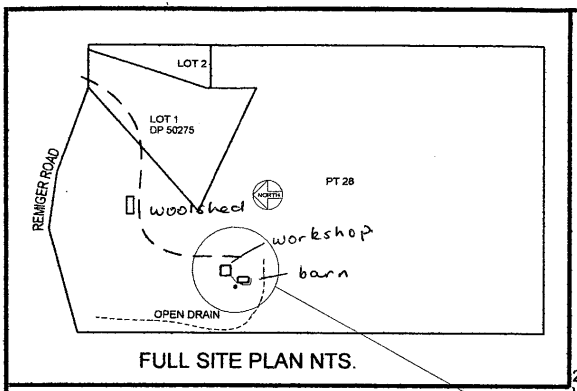

FULL SITE PLAN NTS.

PROPOSED 1 BEDROOM DWELLING ABOVE EXISTING SHED.

NORTH

GT

TV

WATER TANK

2700 L SEPTIC TANK WITH OUTLET FILTER

FALL

FALL

2ND EXISTING SHED

RESERVE AREA SUITABLE FOR ETS BEDS.

EXTRA TOPSOIL

20m SOAKAGE BED AS PER ATTACHED PROFILE. DRAWING #3.

FALL

16

EXISTING METAL DRIVE

Rotorua District Council
PLANS/SPECIFICATIONS
Approved for building consent
AEA9 9/6037
Officer
Date 23/8/99
See Building Consent for conditions.

EXISTING OPEN DRAIN

DO NOT SCALE OFF DRAWING IF IN DOUBT ASK.

I L WATSON CONSULTING
ENGINEER LTD
PHONE (FAX) 094205141

WATSON


PROPOSED NEW 1 BEDROOM ADDITION FOR
RAYMOND NICKLIN AT
53 REMIGER ROAD
PUHOI.
PT ALLOT 28 PSH OF PUHOI (SO 6988)

SITE PLAN

NICLIN01.DW2


1

DRAWN G SMITH	CHECKED	SCALES 1:25	SERIES OF 3
TRACED	DATE: 20-07-99		REF: J831

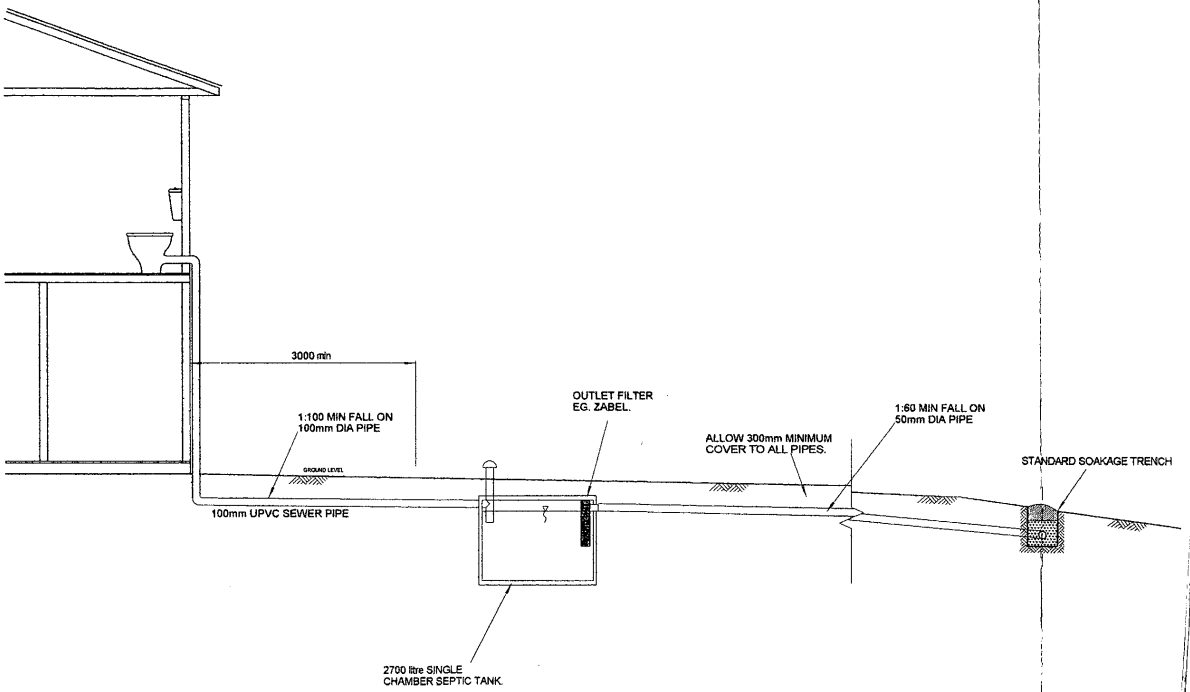

Rodney District Council
PLANS/SPECIFICATIONS
Approved for building
consent
Date 9 2097
Officer AS
Date 23/8/99
See Building Consent for conditions.

I L WATSON CONSULTING ENGINEER LTD PHONE (FAX) 094205141	WATSON	PROPOSED NEW 1 BEDROOM ADDITION FOR RAYMOND NICKLIN AT 53 REMIGER ROAD PUHOI. PT ALLOT 28 PSH OF PUHOI (SO 6988)	LONGSECTION OF PROPOSED EFFLUENT DISPOSAL SYSTEM. NICLIN02.DW2	2
			DRAWN: G SMITH / TRACED; CHECKED / DATE: 21-07-99; SCALES 1:50	SERIES OF: 3; REF: J831

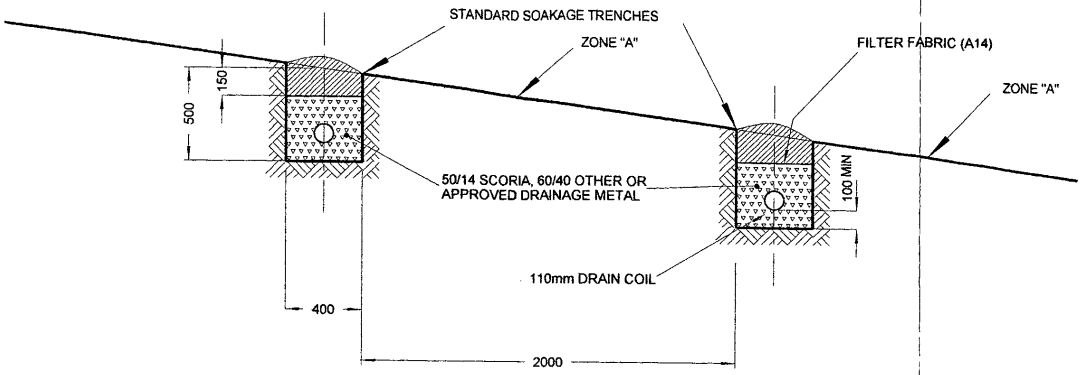

NOTE:
REFER TO PLAN LAYOUT
FOR NUMBER AND LENGTH
OF BEDS.

NOTE:
1. PLANTING IN ZONE "A"
   DOWN SLOPE FROM EACH BED CAN BE PLANTED IN SHRUBS E.G. LILLYS OR FLAX.
2. EACH SOAKAGE BED TO BE CUT TO FOLLOW THE CONTOUR OF THE LAND, NOT NECESSARILY STRAIGHT LINES.
   END TO END GROUND SURFACE LEVELS NOT TO DEVIATE MORE THAN 100mm.
   INVERT OF SOAKAGE PIPE TO SLOPE NO MORE THAN 1:200 FROM INLET POINT. MAX GRADIENT VARIATION +/- 50mm.
3. PLACE FENCING AROUND BEDS IF NECESSARY TO PROTECT THEM FROM STOCK ETC.
4. FOR BED LENGTHS AND LOCATION REFER TO PLAN.
5. ENGINEER TO OBSERVE BEDS PRIOR TO PLACING BEDDING MATERIALS.

Rodney District Council
PLANS/SPECIFICATIONS
Approved for building
consent
ABA 992037
Officer AS
Date 23/8/99
See Building Consent for
conditions

SECTION:
TYPICAL SOAKAGE BED FOR SEPTIC TANK EFFLUENT.

DO NOT SCALE OFF DRAWING. IF IN DOUBT ASK.

I L WATSON CONSULTING
ENGINEER LTD
PHONE (FAX) 094205141

WATSON

PROPOSED NEW 1 BEDROOM ADDITION FOR
RAYMOND NICKLIN AT
53 REMIGER ROAD
PUHOI.
PT ALLOT 28 PSH OF PUHOI (SO 6988)

NICLIN03.DW2

SOAKAGE BED DETAILS

3

DRAWN: G SMITH	CHECKED	SCALES 1:20	SERIES OF: 3
TRACED	DATE 21-07-99		REF: J831