R.C. & D.E. NICKLIN, 53B REMIGER ROAD, PUHOI

For ENGINEERING CONSENT (SUB 60315119)

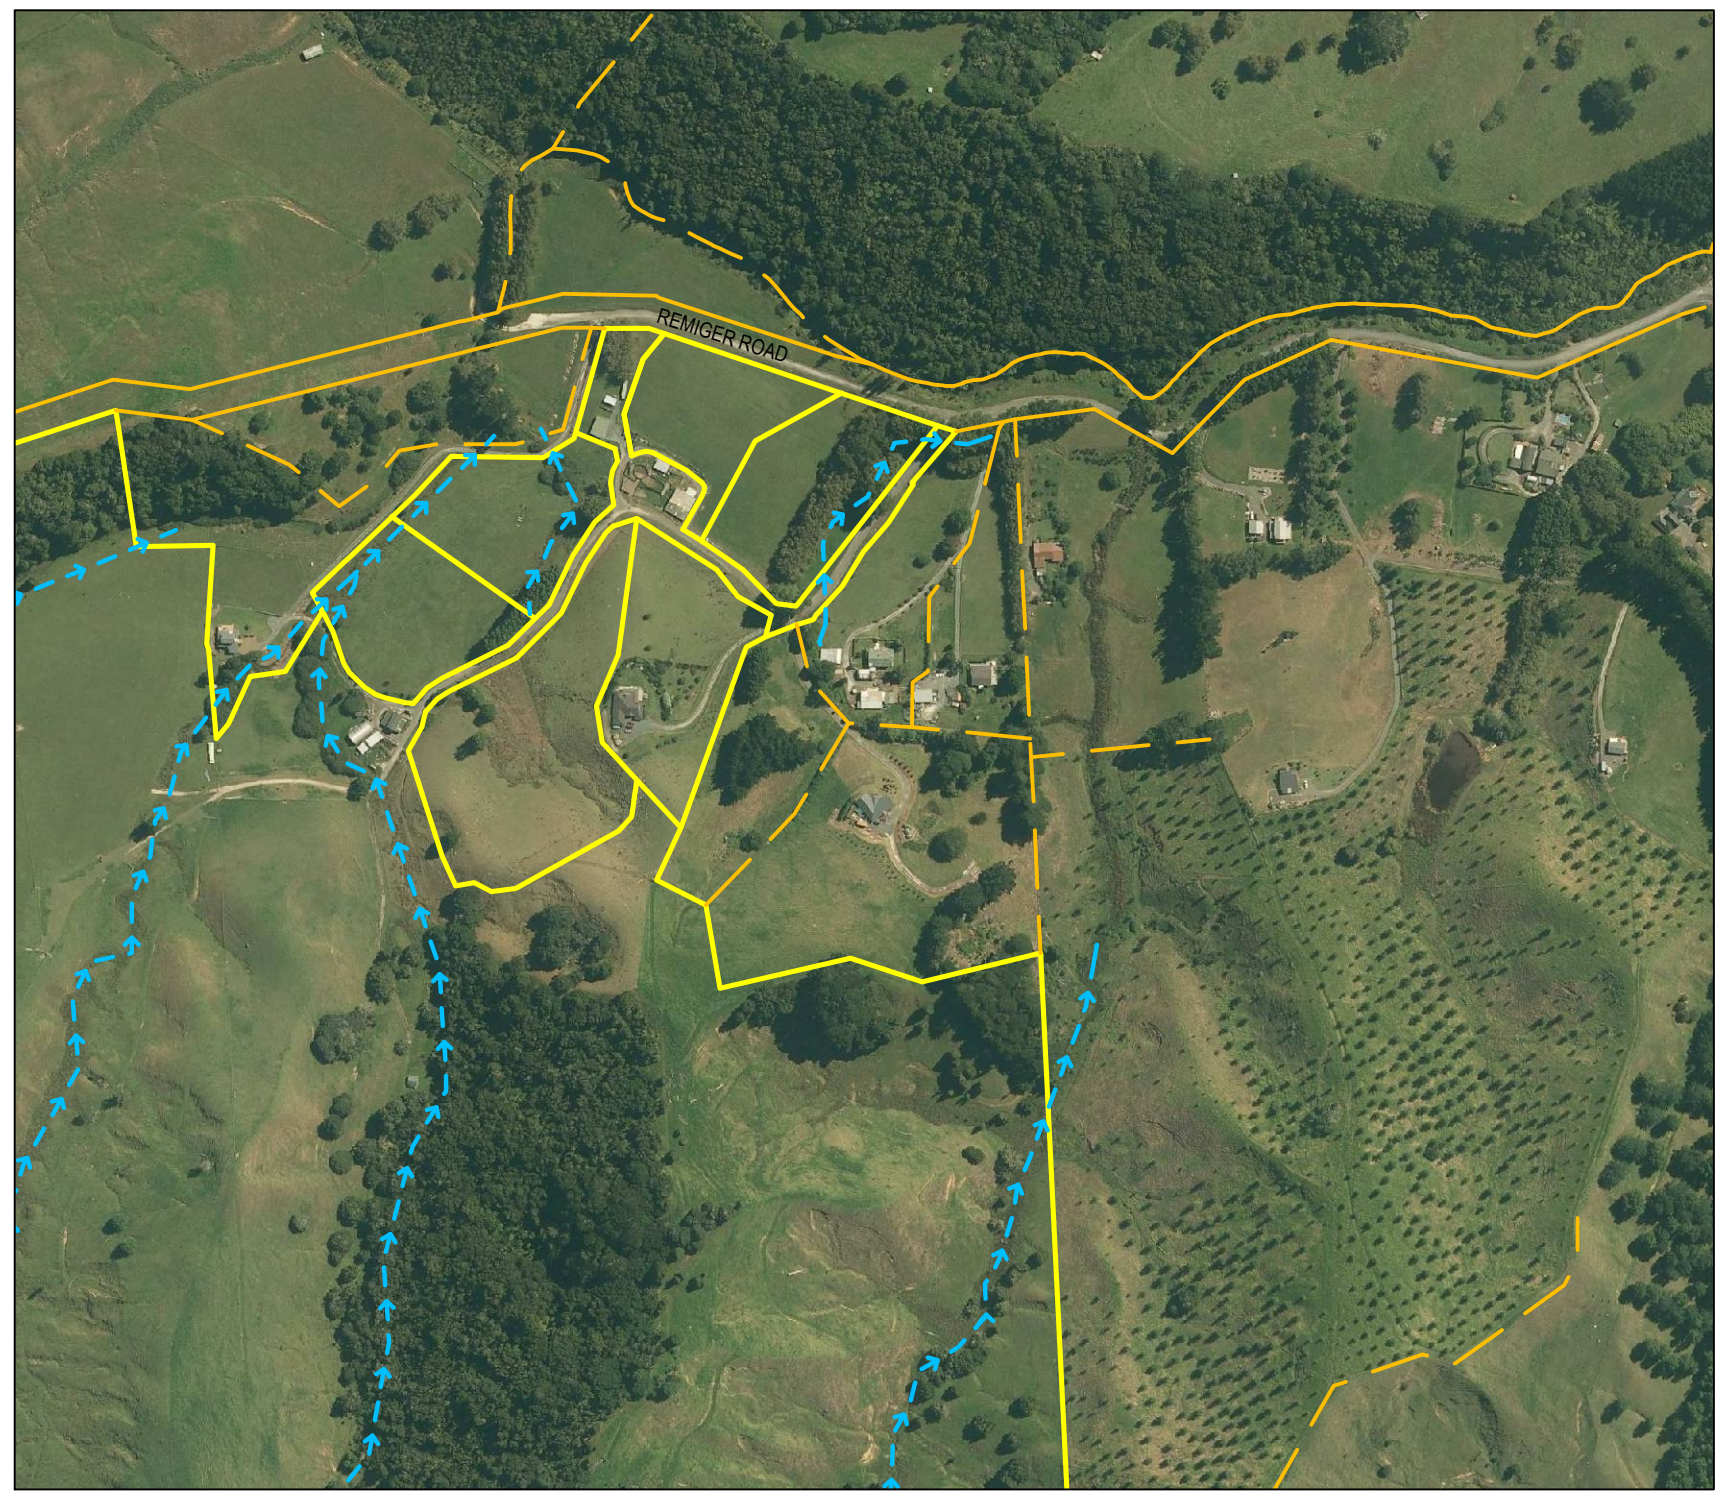

LOCATION DIAGRAM
1:10000

Plan No	Rev	Plan Title
		Right of Way
2000	A	Proposed Driveway Overall Plan
2001	A	Proposed Contours and Accessway Plan Sheet 1 of 2
2002	A	Proposed Contours and Accessway Plan Sheet 2 of 2
		Earthworks
2100	A	Cut/Fill and Erosion/Sediment Control Plan
		Long Section
3100	A	Proposed ROW Long Section Sheet 1 of 2
3101	A	Proposed ROW Long Section Sheet 2 of 2
		Cross Sections
3200	A	Proposed ROW Typical Cross Section

CATO BOLAM CONSULTANTS
PLANNERS | SURVEYORS | ENGINEERS | ENVIRONMENTAL

DATE MAY 2019
ORIGINAL SIZE A3
DRAWING NO. 40320-DR-C-0000-0

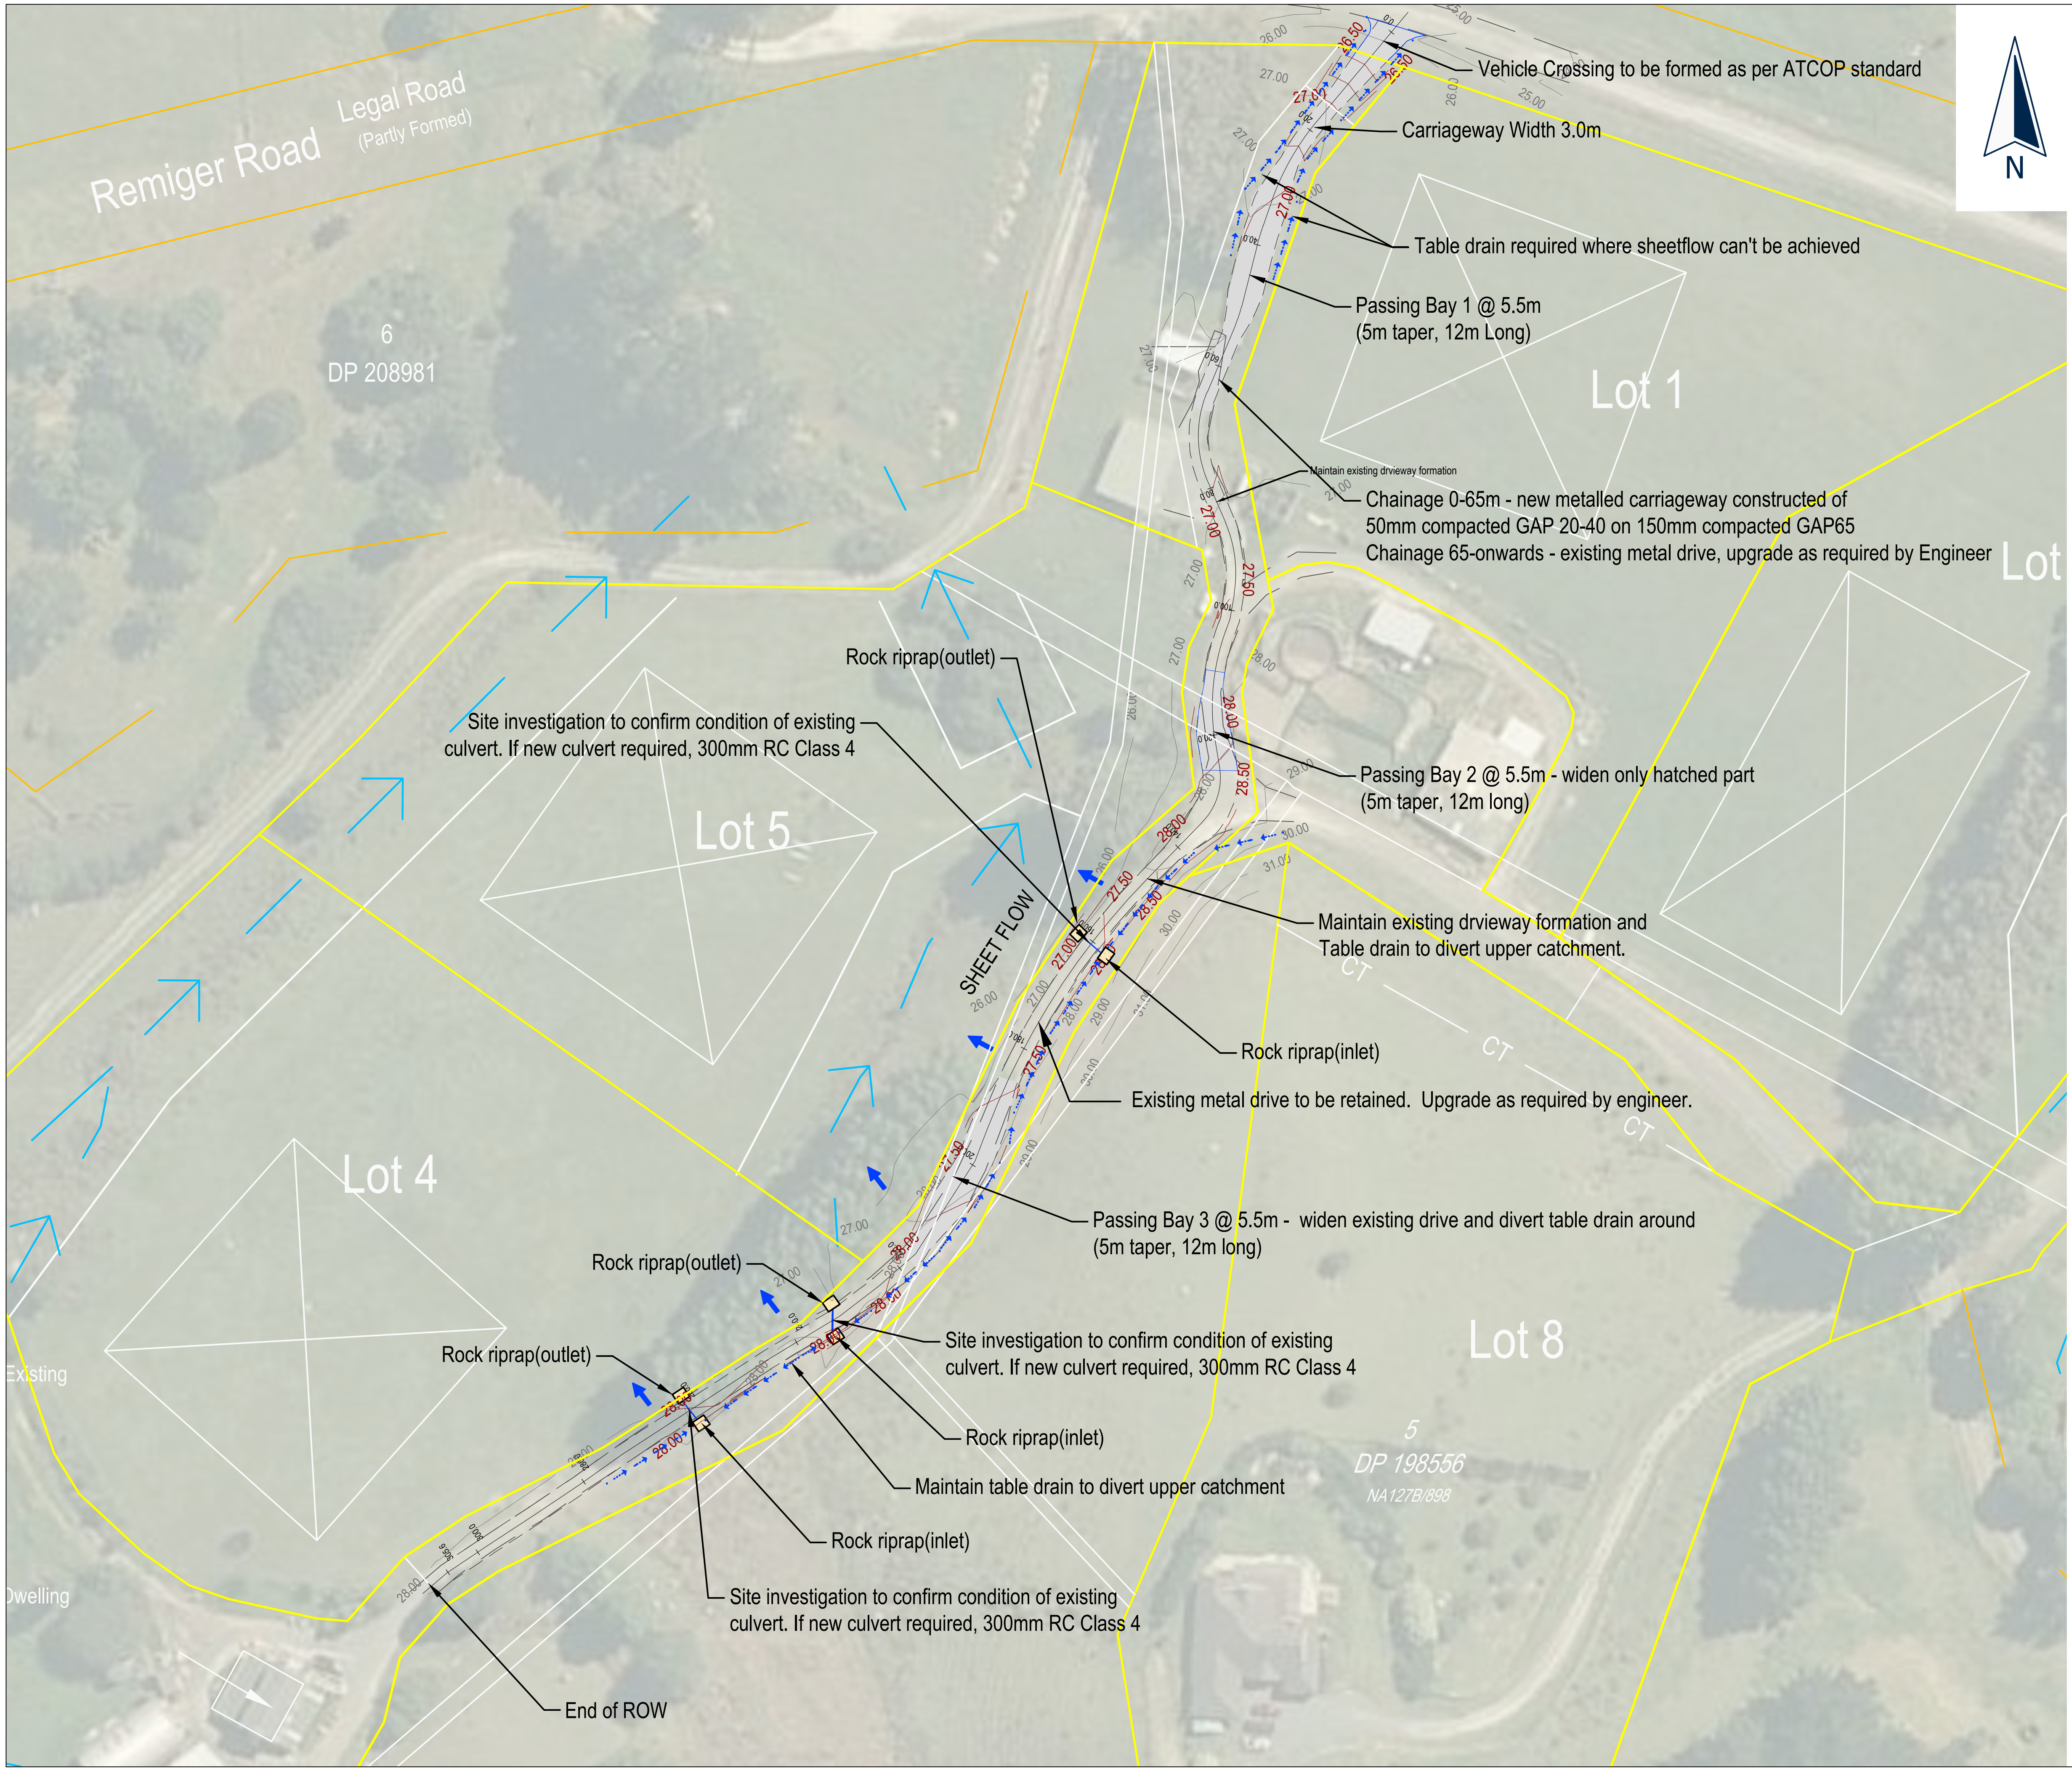
N
Remiger Road
Legal Road
(Partly Formed)
6
DP 208981
Lot 1
Lot 5
Lot 4
Lot 8
Lot
5
DP 198556
NA127B/898
Existing
Dwelling
SHEET FLOW
CT
Vehicle Crossing to be formed as per ATCOP standard
Carriageway Width 3.0m
Table drain required where sheetflow can't be achieved
Passing Bay 1 @ 5.5m
(5m taper, 12m Long)
Maintain existing drvieway formation
Chainage 0-65m - new metalled carriageway constructed of
50mm compacted GAP 20-40 on 150mm compacted GAP65
Chainage 65-onwards - existing metal drive, upgrade as required by Engineer
Rock riprap(outlet)
Site investigation to confirm condition of existing
culvert. If new culvert required, 300mm RC Class 4
Passing Bay 2 @ 5.5m - widen only hatched part
(5m taper, 12m long)
Maintain existing drvieway formation and
Table drain to divert upper catchment.
Rock riprap(inlet)
Existing metal drive to be retained. Upgrade as required by engineer.
Passing Bay 3 @ 5.5m - widen existing drive and divert table drain around
(5m taper, 12m long)
Rock riprap(outlet)
Site investigation to confirm condition of existing
culvert. If new culvert required, 300mm RC Class 4
Rock riprap(outlet)
Rock riprap(inlet)
Maintain table drain to divert upper catchment
Rock riprap(inlet)
Site investigation to confirm condition of existing
culvert. If new culvert required, 300mm RC Class 4
End of ROW

NOTES

GENERAL

1. The Contractor shall be responsible for locating all existing services prior to commencement of works. The Contractor shall make good at their own expense any damage to existing services.
2. Levels are in terms of Auckland Vertical Datum 1946.
3. All works are to be installed as per
   - Auckland Transport's Code of Practice "ATCOP".
   - Auckland Council Code of Practice for Land Development and Subdivision - Chapter 4 Stormwater
4. Standard Drawings available from their respective websites or the Engineer.
5. If discrepancies are found between the standards, confirmation shall be sought from the Engineer and supervising council field officer.

DRIVEWAYS

1. Driveways and vehicle crossings to comply with Standard Drawings as required and shall apply through the passing bays.
2. The Engineer must view the subgrade prior to the application of the bedding material.
3. All pavement layers require inspection and approval from the supervising Engineer.

CATO BOLAM CONSULTANTS
PLANNERS | SURVEYORS | ENGINEERS | ENVIRONMENTAL

PROJECT

R.C. & D.E. NICKLIN
53B REMIGER ROAD
PUHOI

DRAWING TITLE

PROPOSED RIGHT OF WAY
OVERALL PLAN

FOR ENGINEERING APPROVAL

No.	REVISION (DESCRIPTIONS)	NAME	DATE
A	Issued for Engineering Approval	MR	03/05/2019

SURVEYED	LD	01/04/2019
DESIGNED	MR	03/05/2019
DRAWN	MR	03/05/2019

DATE	ORIGINAL SCALE	ORIGINAL SIZE
03/05/2019	1:1000	A3

DRAWING NO.	REVISION
40320-DR-C-2000	A

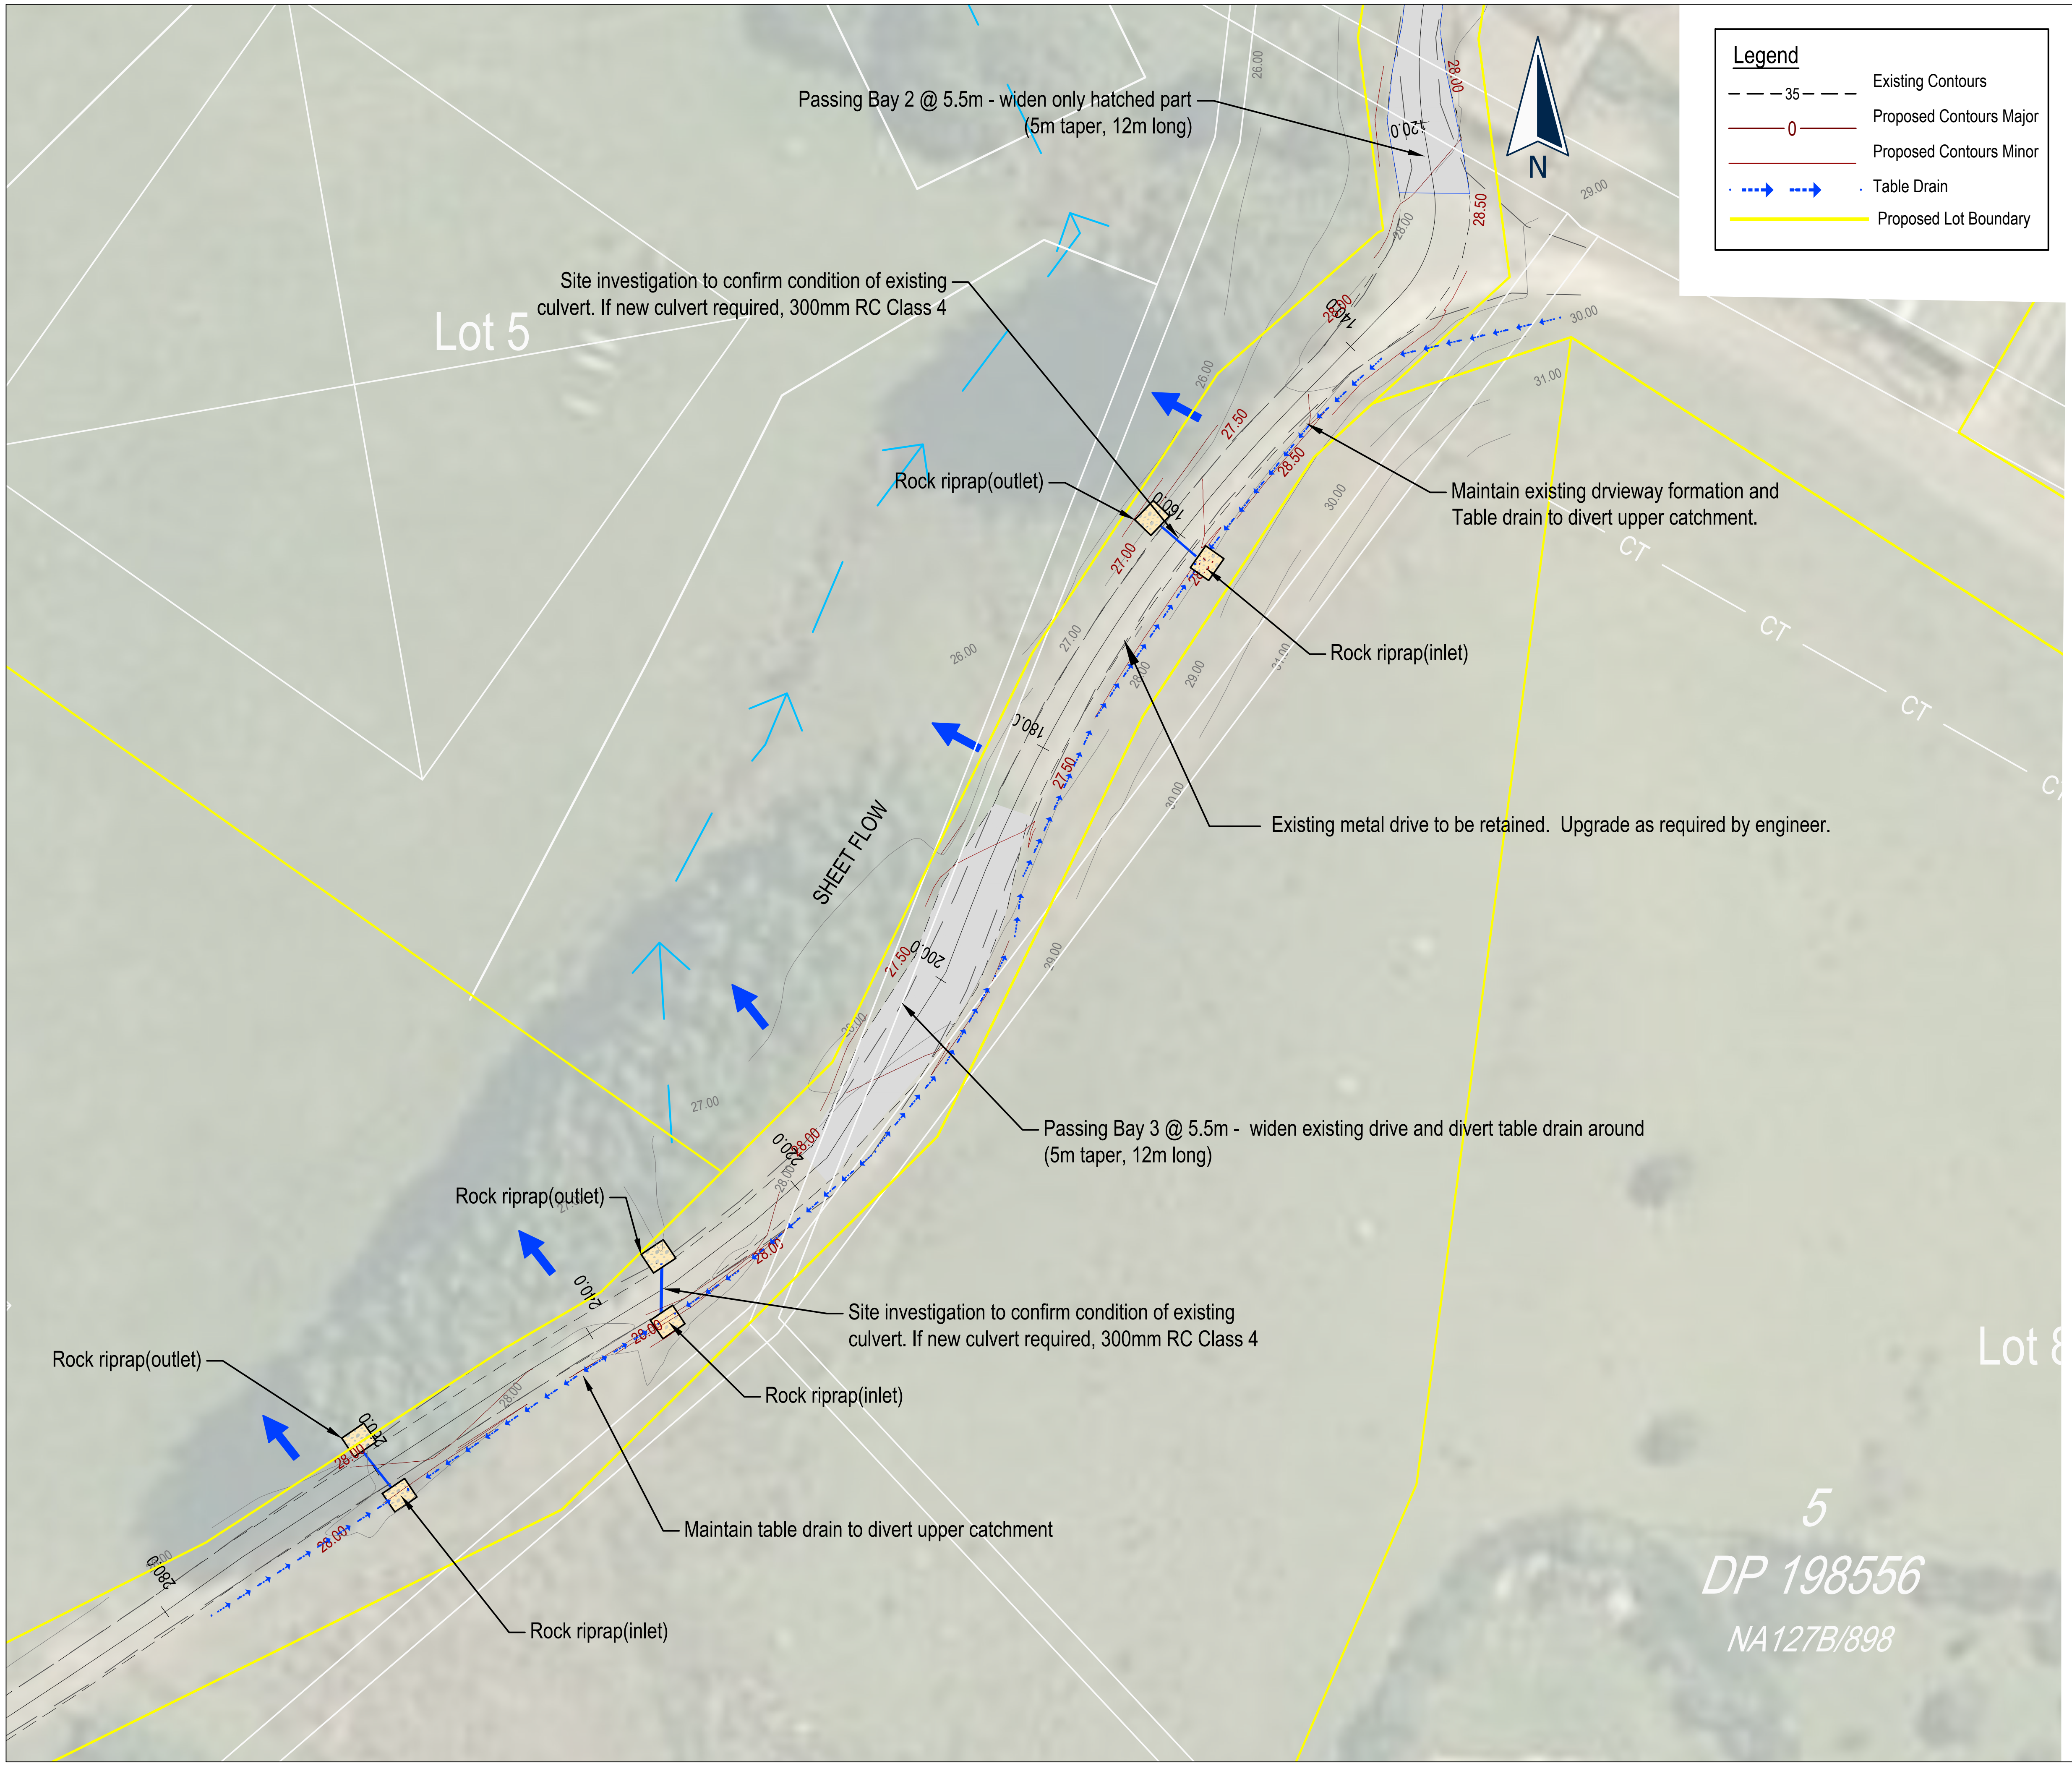
Legend
Existing Contours
Proposed Contours Major
Proposed Contours Minor
Table Drain
Proposed Lot Boundary
35
0
N
Passing Bay 2 @ 5.5m - widen only hatched part (5m taper, 12m long)
Site investigation to confirm condition of existing culvert. If new culvert required, 300mm RC Class 4
Lot 5
Rock riprap(outlet)
Maintain existing drvieway formation and Table drain to divert upper catchment.
Rock riprap(inlet)
Existing metal drive to be retained. Upgrade as required by engineer.
SHEET FLOW
Passing Bay 3 @ 5.5m - widen existing drive and divert table drain around (5m taper, 12m long)
Rock riprap(outlet)
Site investigation to confirm condition of existing culvert. If new culvert required, 300mm RC Class 4
Rock riprap(inlet)
Rock riprap(outlet)
Maintain table drain to divert upper catchment
Rock riprap(inlet)
CT
CT
CT
Lot 8
5
DP 198556
NA127B/898
120.0
140.0
160.0
180.0
200.0
220.0
240.0
260.0
280.0
26.00
27.00
27.50
28.00
28.50
29.00
30.00
31.00

NOTES

GENERAL

1. The Contractor shall be responsible for locating all existing services prior to commencement of works. The Contractor shall make good at their own expense any damage to existing services.
2. Levels are in terms of Auckland Vertical Datum 1946.
3. All works are to be installed as per
   - Auckland Transport's Code of Practice "ATCOP".
   - Auckland Council Code of Practice for Land Development and Subdivision - Chapter 4 Stormwater
4. Standard Drawings available from their respective websites or the Engineer.
5. If discrepancies are found between the standards, confirmation shall be sought from the Engineer and supervising council field officer.

DRIVEWAYS

1. Driveways and vehicle crossings to comply with Standard Drawings as required and shall apply through the passing bays.
2. The Engineer must view the subgrade prior to the application of the bedding material.
3. All pavement layers require inspection and approval from the supervising Engineer.

CATO BOLAM CONSULTANTS
PLANNERS | SURVEYORS | ENGINEERS | ENVIRONMENTAL

PROJECT

R.C. & D.E. NICKLIN
53B REMIGER ROAD
PUHOI

DRAWING TITLE

PROPOSED CONTOURS AND
ACCESSWAY PLAN
SHEET 2 OF 2

FOR ENGINEERING APPROVAL

No.	REVISION (DESCRIPTIONS)	NAME	DATE
A	Issued for Engineering Approval	MR	21/05/2019
SURVEYED		LD	01/04/2019
DESIGNED		MR	03/05/2019
DRAWN		MR	03/05/2019

DATE	ORIGINAL SCALE	ORIGINAL SIZE
21/05/2019	1:1000	A3

DRAWING NO.	REVISION
40320-DR-C-2002	A

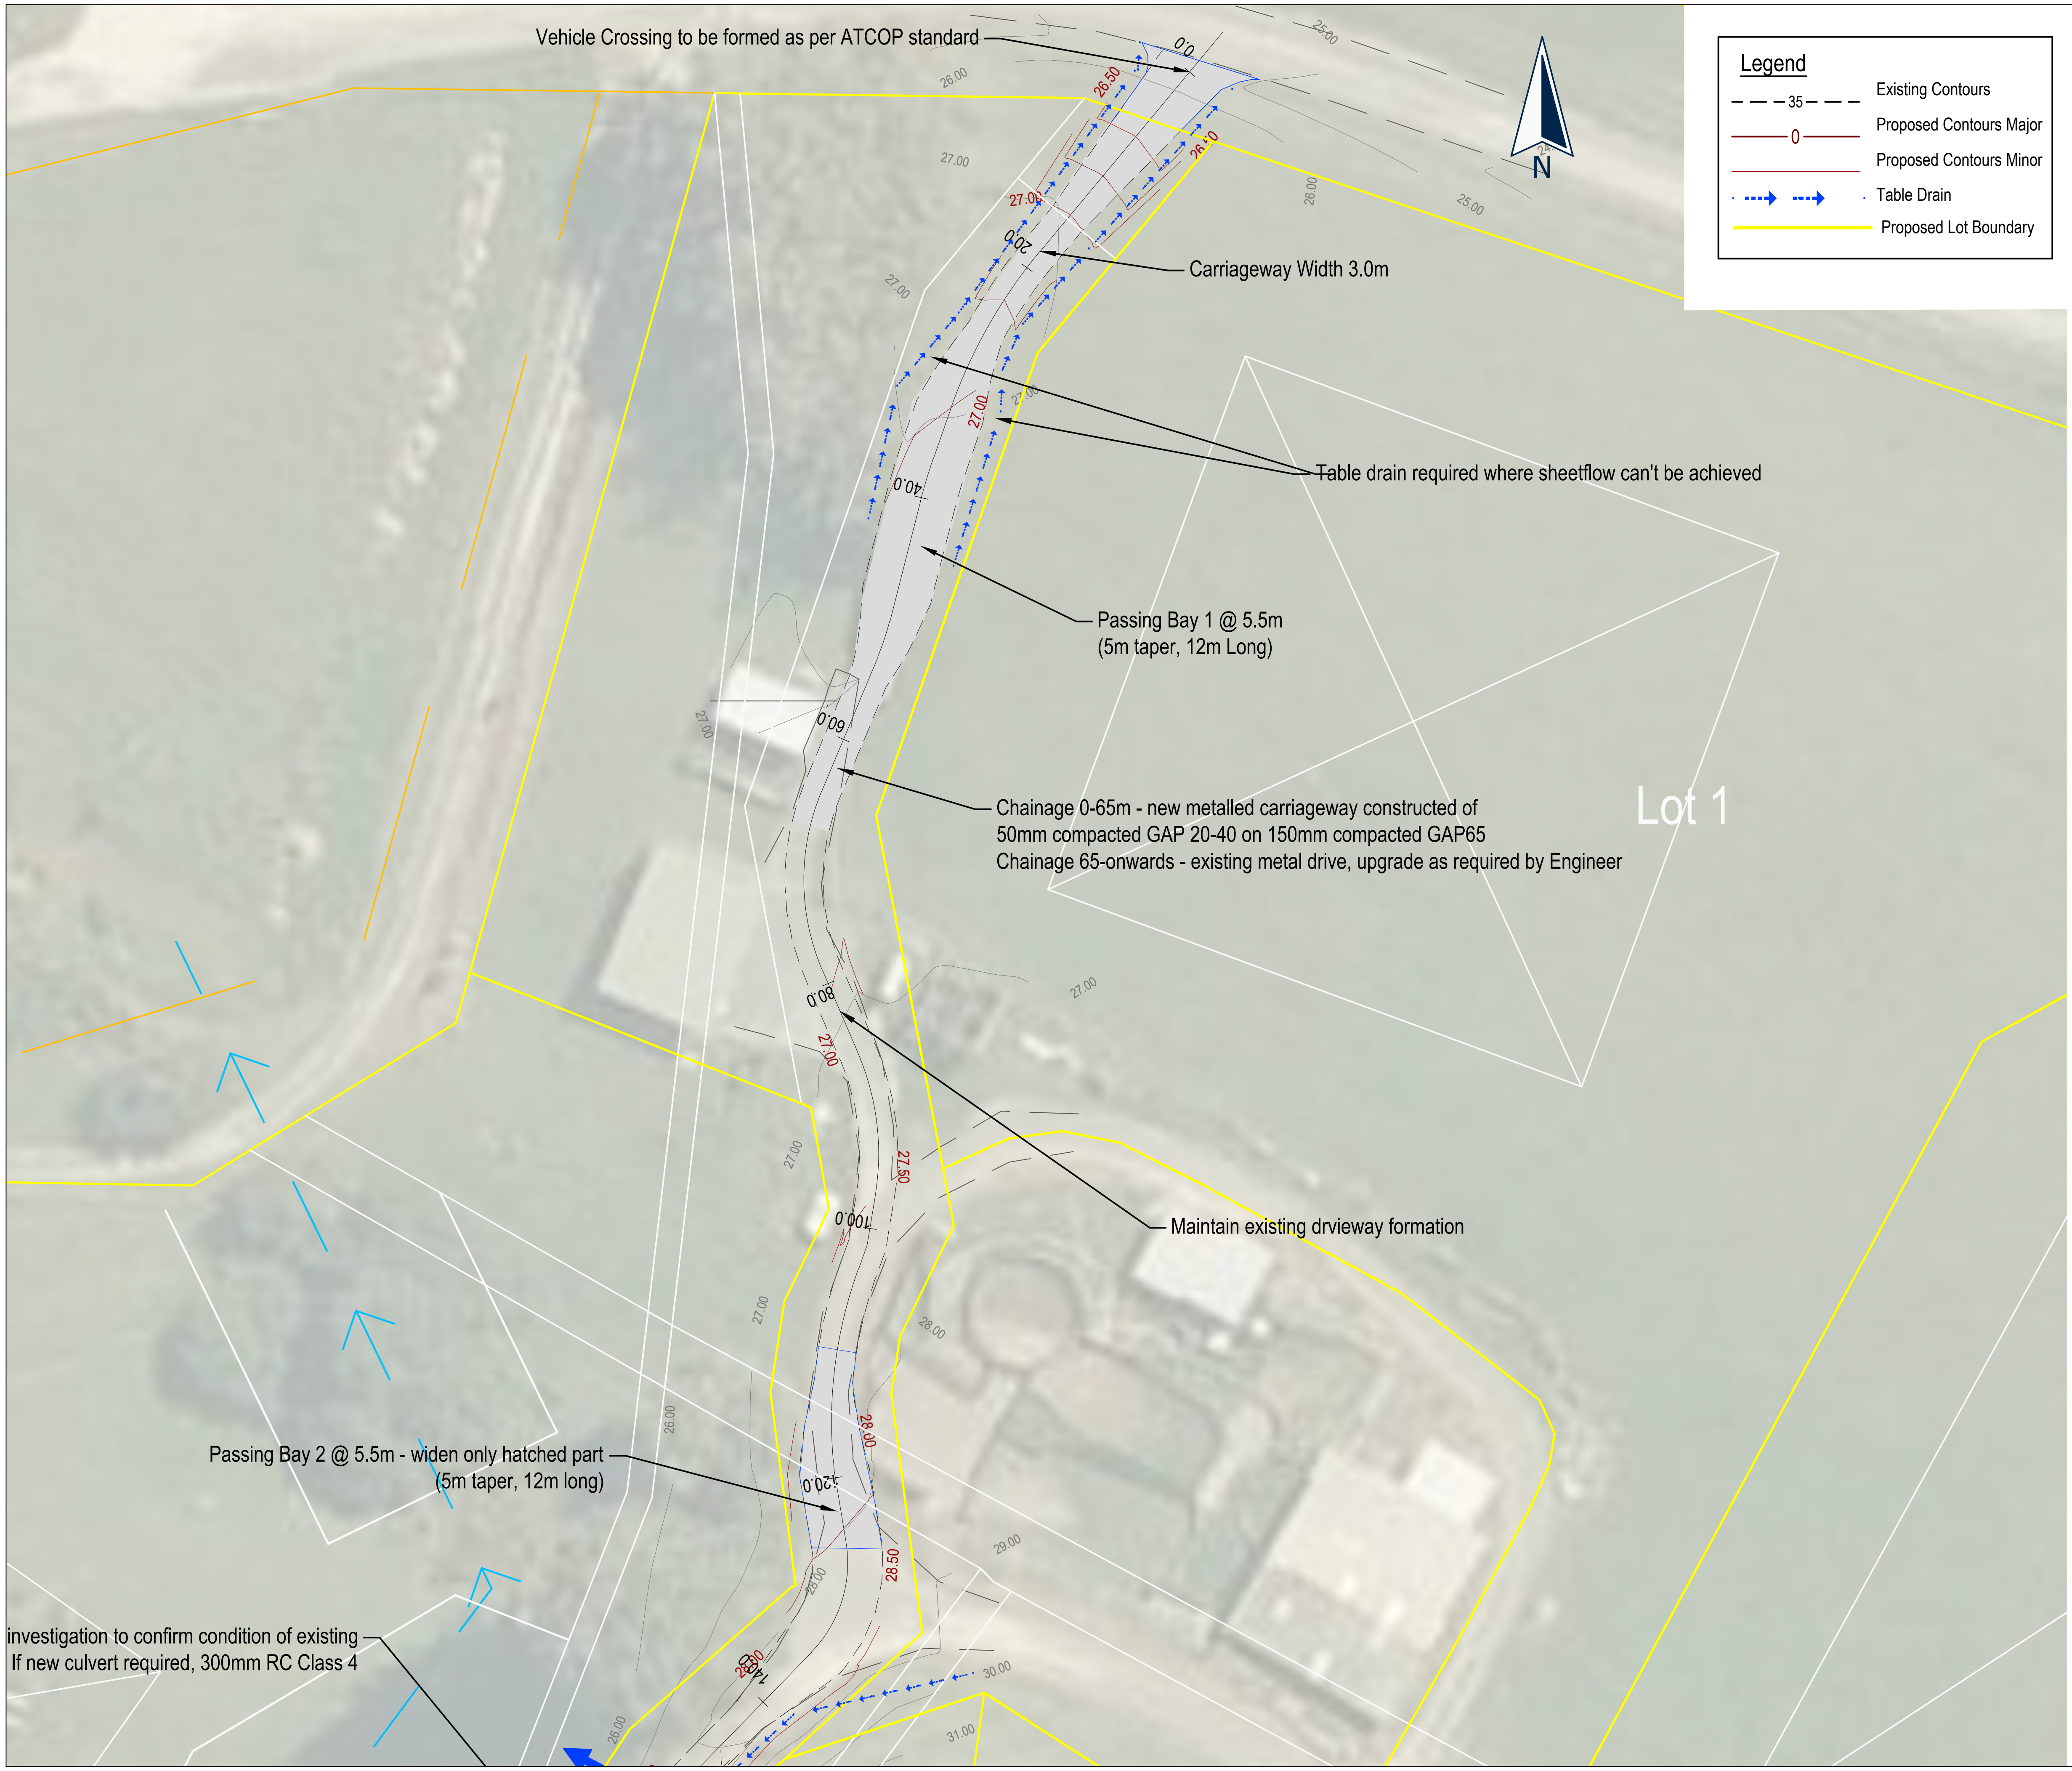

Vehicle Crossing to be formed as per ATCOP standard

Carriageway Width 3.0m

Table drain required where sheetflow can't be achieved

Passing Bay 1 @ 5.5m
(5m taper, 12m Long)

Chainage 0-65m - new metalled carriageway constructed of
50mm compacted GAP 20-40 on 150mm compacted GAP65
Chainage 65-onwards - existing metal drive, upgrade as required by Engineer

Maintain existing drvieway formation

Passing Bay 2 @ 5.5m - widen only hatched part
(5m taper, 12m long)

investigation to confirm condition of existing
If new culvert required, 300mm RC Class 4

NOTES

GENERAL

1. The Contractor shall be responsible for locating all existing services prior to commencement of works. The Contractor shall make good at their own expense any damage to existing services.
2. Levels are in terms of Auckland Vertical Datum 1946.
3. All works are to be installed as per
   - Auckland Transport's Code of Practice "ATCOP".
   - Auckland Council Code of Practice for Land Development and Subdivision - Chapter 4 Stormwater
4. Standard Drawings available from their respective websites or the Engineer.
5. If discrepancies are found between the standards, confirmation shall be sought from the Engineer and supervising council field officer.

DRIVEWAYS

1. Driveways and vehicle crossings to comply with Standard Drawings as required and shall apply through the passing bays.
2. The Engineer must view the subgrade prior to the application of the bedding material.
3. All pavement layers require inspection and approval from the supervising Engineer.

CATO BOLAM
CONSULTANTS
PLANNERS | SURVEYORS | ENGINEERS | ENVIRONMENTAL

PROJECT

R.C. & D.E. NICKLIN
53B REMIGER ROAD
PUHOI

DRAWING TITLE

PROPOSED CONTOURS AND
ACCESSWAY PLAN
SHEET 1 OF 2

FOR ENGINEERING APPROVAL

No.	REVISION (DESCRIPTIONS)	NAME	DATE
A	Issued for Engineering Approval	MR	21/05/2019
SURVEYED		LD	01/04/2019
DESIGNED		MR	03/05/2019
DRAWN		MR	03/05/2019

DATE	ORIGINAL SCALE	ORIGINAL SIZE
21/05/2019	1:1000	A3

DRAWING NO.	REVISION
40320-DR-C-2001	A

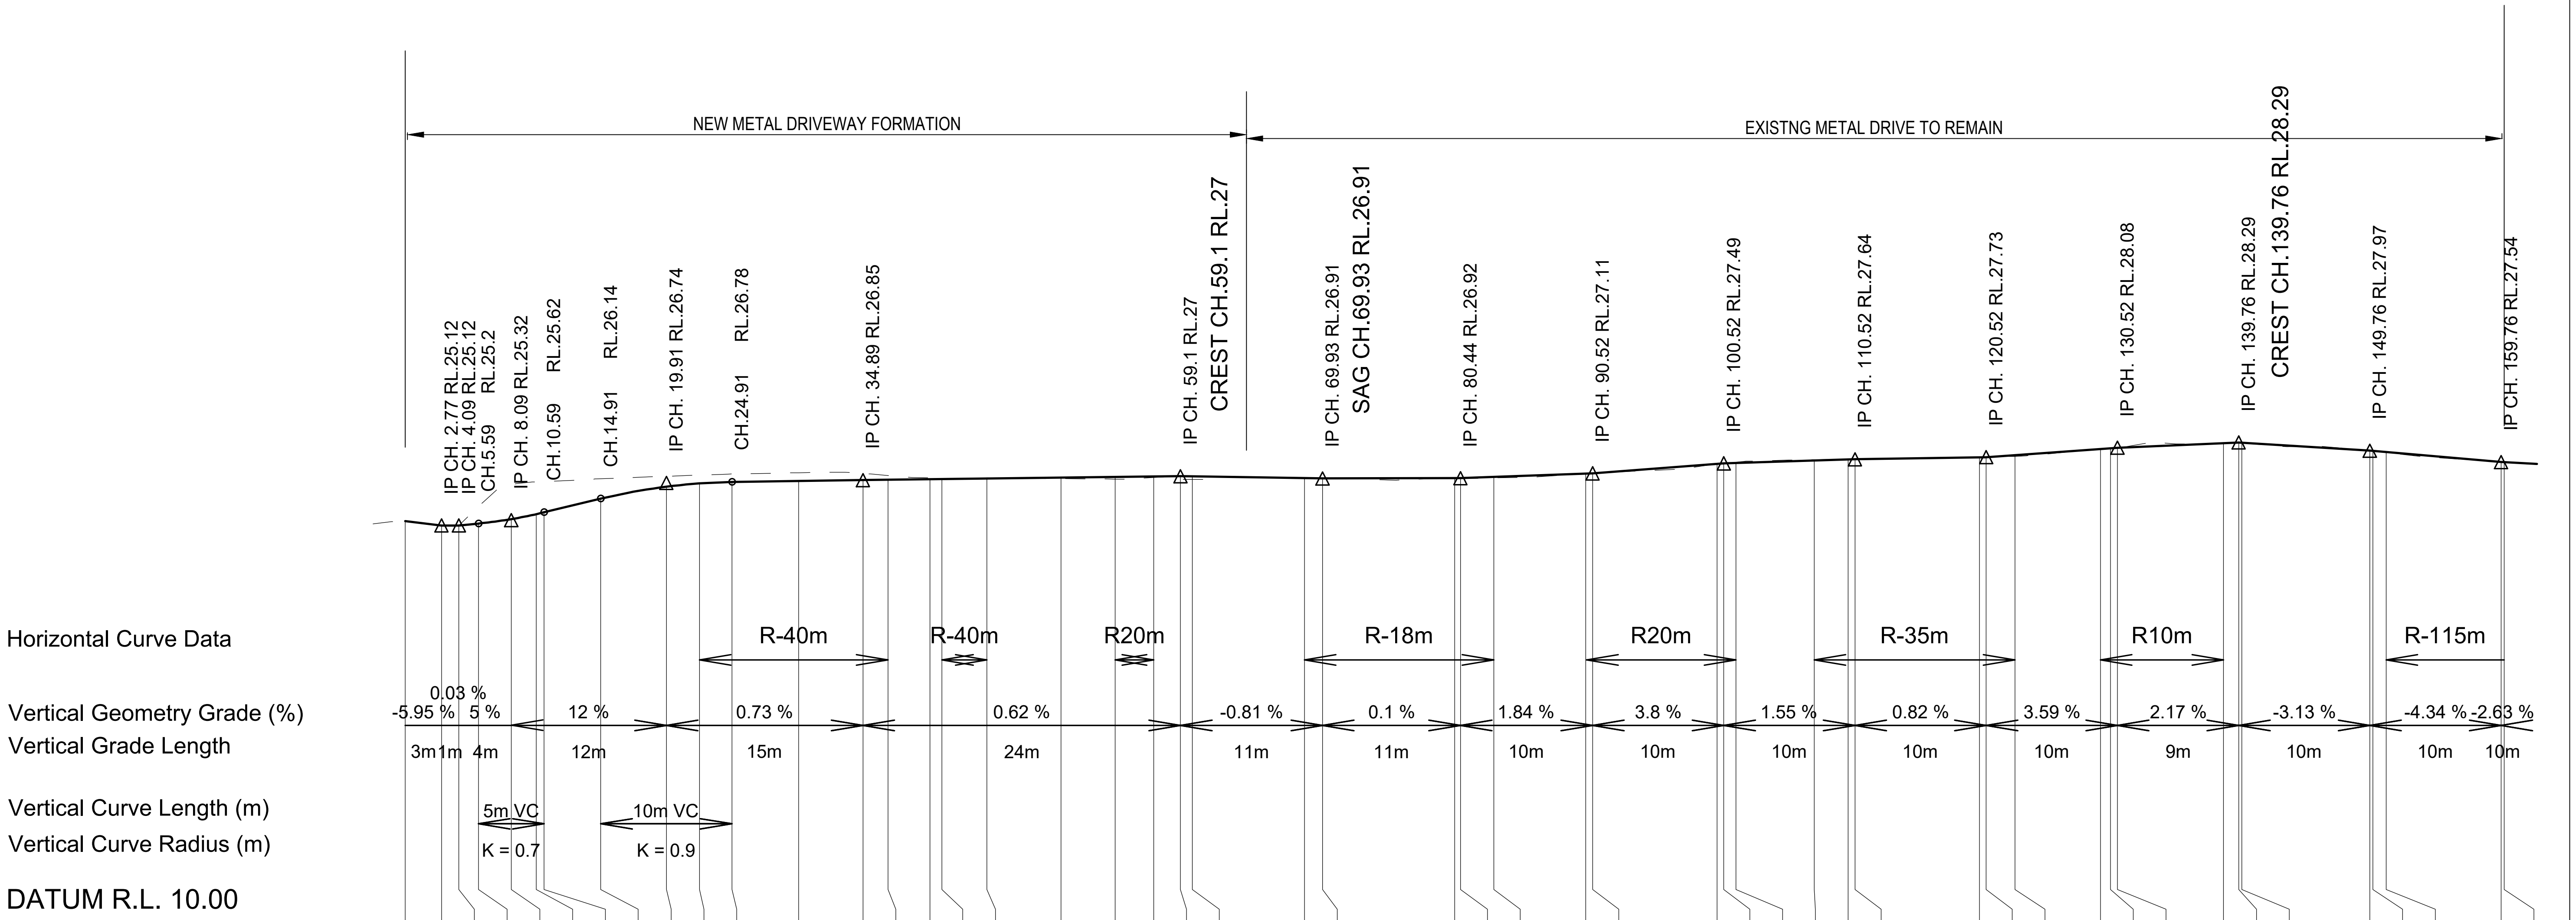

Finished Levels	25.29	25.12	25.12	25.20	25.37	25.55	25.62	26.14	26.60	26.72	26.78	26.81
Existing Ground	25.29	25.12	25.12	25.84	26.66	26.78	26.79	26.90	27.00	27.04	27.08	27.13
Cut / Fill Depth	0.00	0.00	0.00	-0.64	-1.29	-1.23	-1.17	-0.76	-0.40	-0.32	-0.31	-0.32
Chainage	0.00	2.77	4.09	5.59	8.09	10.00	10.59	14.91	19.91	22.43	24.91	30.00

Finished Levels	26.85	26.86	26.88	26.89	26.91	26.94	26.97	26.99	27.00	26.99	26.92	26.91
Existing Ground	27.11	27.03	26.93	26.92	26.94	26.91	26.89	26.94	26.89	26.87	26.93	26.92
Cut / Fill Depth	-0.26	-0.17	-0.05	-0.04	-0.03	0.04	0.08	0.04	0.11	0.12	-0.00	-0.00
Chainage	34.89	36.80	40.00	40.91	44.35	50.00	54.12	57.05	59.10	60.00	68.55	69.93

Finished Levels	26.92	26.92	26.97	27.10	27.11	27.47	27.49	27.50	27.60	27.64	27.64	27.72
Existing Ground	26.91	26.92	26.93	27.09	27.11	27.46	27.49	27.53	27.63	27.64	27.64	27.72
Cut / Fill Depth	0.01	0.01	0.04	0.01	0.00	0.01	0.00	-0.03	-0.03	-0.01	0.00	0.00
Chainage	80.00	80.44	82.98	90.00	90.52	100.00	100.52	101.43	107.40	110.00	110.52	120.00

Finished Levels	27.73	27.80	28.04	28.07	28.08	28.26	28.29	28.28	27.97	27.96	27.92	27.54	27.53
Existing Ground	27.73	27.76	28.03	28.05	28.08	28.28	28.29	28.27	27.97	27.96	27.90	27.54	27.53
Cut / Fill Depth	0.00	0.05	0.01	0.01	0.01	-0.02	0.00	0.01	0.00	0.00	0.02	0.00	0.00
Chainage	120.52	122.71	129.22	130.00	130.52	138.61	139.76	140.00	149.76	150.00	151.00	159.76	160.00

LONGITUDINAL SECTION - RIGHT OF WAY SHEET 1 OF 2

Horizontal Scale 1 : 500
Vertical Scale 1 : 250

CATO BOLAM
CONSULTANTS
PLANNERS | SURVEYORS | ENGINEERS | ENVIRONMENTAL

PROJECT
R.C. & D.E. NICKLIN
53B REMIGER ROAD
PUHOI

DRAWING TITLE
PROPOSED RIGHT OF WAY
LONG SECTION
SHEET 1 OF 2

No.	REVISION (DESCRIPTIONS)	NAME	DATE
A	Issued for Engineering Approval	MR	03/05/2019

FOR ENGINEERING APPROVAL

	NAME	DATE
SURVEYED	LD	01/04/2019
DESIGNED	MR	03/05/2019
DRAWN	MR	03/05/2019

DATE: 22/05/2019
ORIGINAL SCALE: AS SHOWN
ORIGINAL SIZE: A3
DRAWING NO.: 40320-DR-C-3100
REVISION: A

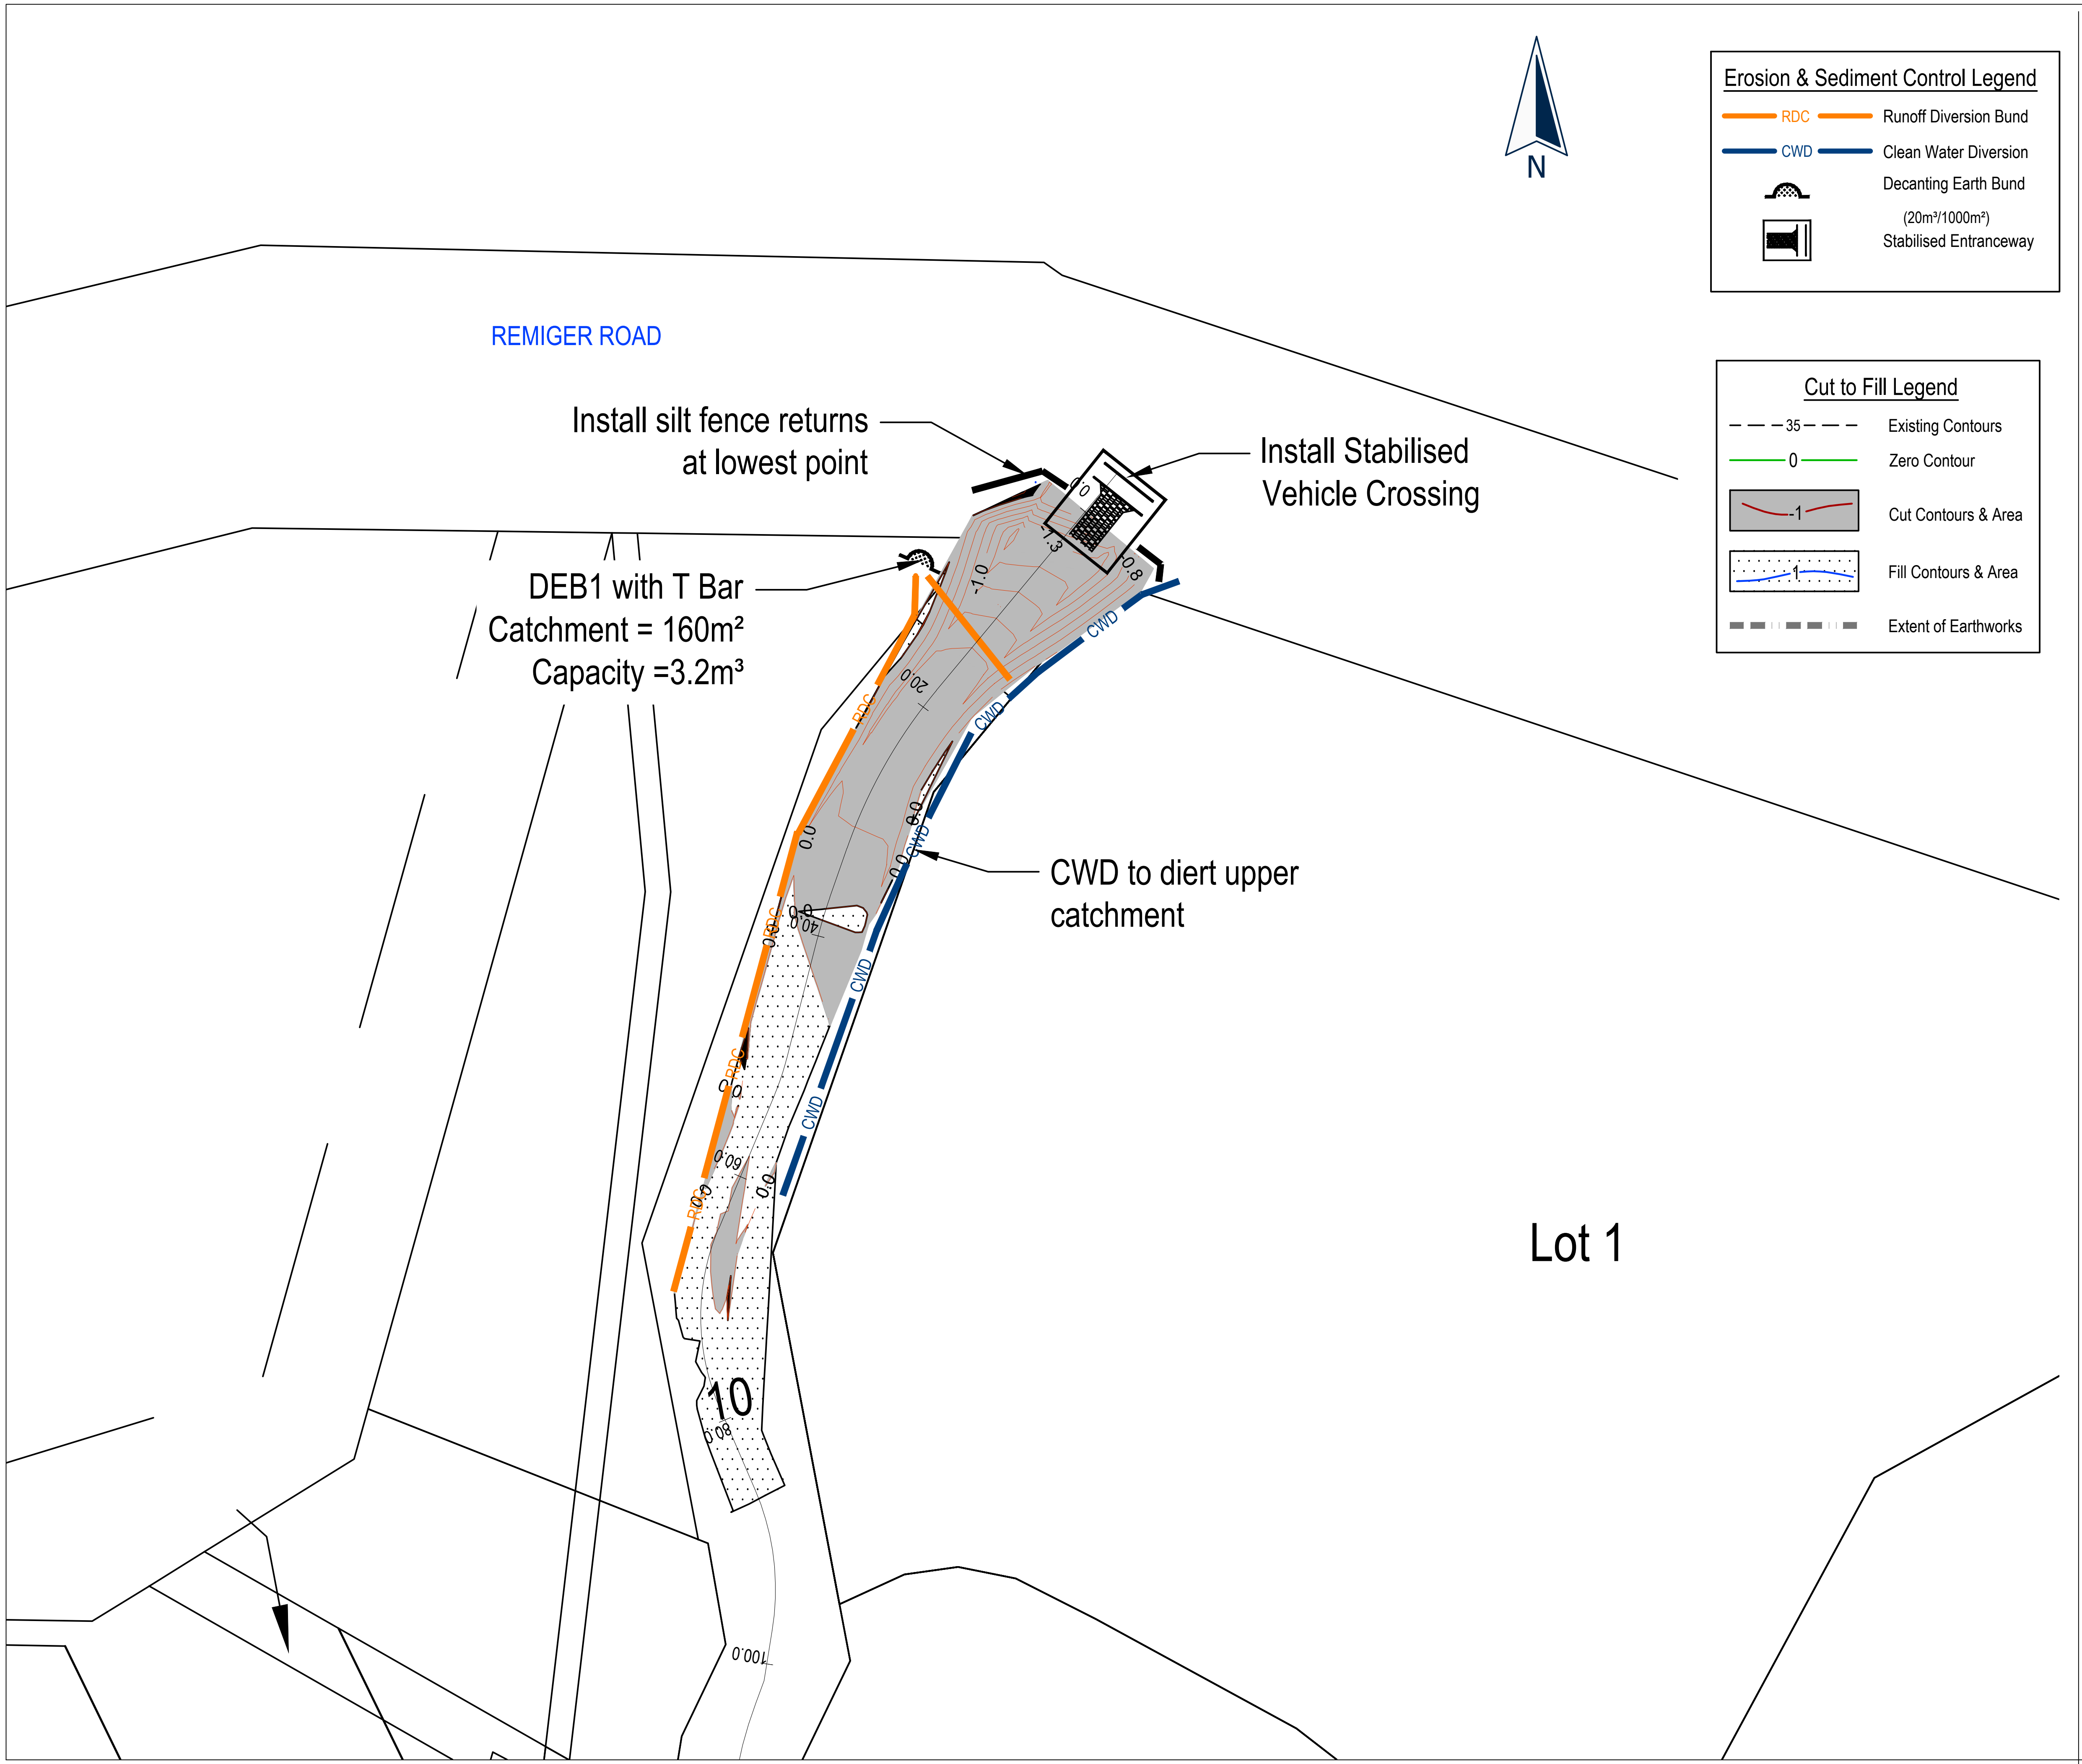

Install silt fence returns
at lowest point

Install Stabilised
Vehicle Crossing

DEB1 with T Bar
Catchment = 160m²
Capacity =3.2m³

CWD to diert upper
catchment

Erosion & Sediment Control Legend

RDC — Runoff Diversion Bund
CWD — Clean Water Diversion
Decanting Earth Bund
(20m³/1000m²)
Stabilised Entranceway

Cut to Fill Legend

— — 35 — — Existing Contours
— 0 — Zero Contour
-1 Cut Contours & Area
1 Fill Contours & Area
Extent of Earthworks

NOTES

GENERAL

1. The Contractor shall be responsible for locating all existing services prior to commencement of works. The Contractor shall make good at their own expense any damage to existing services.
2. Levels are in terms of Auckland Vertical Datum 1946.
3. All works are to be installed as per
   - Auckland Transport's Code of Practice "ATCOP".
   - Auckland Council Code of Practice for Land Development and Subdivision - Chapter 4 Stormwater
4. Standard Drawings available from their respective websites or the Engineer.
5. If discrepancies are found between the standards, confirmation shall be sought from the Engineer and supervising council field officer.

EROSION AND SEDIMENT CONTROL

1. All sediment and erosion control measures are to be installed in compliance with the approved drawings and Auckland Council's Erosion & Sediment Control Guide for Land Disturbing Activities in the Auckland Region (GD05).
2. Consent documents must be held on site at all times.

CATO BOLAM
CONSULTANTS
PLANNERS | SURVEYORS | ENGINEERS | ENVIRONMENTAL

PROJECT

R.C. & D.E. NICKLIN
53B REMIGER ROAD
PUHOI

DRAWING TITLE

CUT / FILL AND
EROSION / SEDIMENT
CONTROL PLAN

FOR ENGINEERING APPROVAL

No.	REVISION (DESCRIPTIONS)	NAME	DATE
A	Issued for Engineering Approval	MR	21/05/2019
SURVEYED		LD	01/04/2019
DESIGNED		MR	03/05/2019
DRAWN		MR	03/05/2019

DATE	ORIGINAL SCALE	ORIGINAL SIZE
21/05/2019	1:1000	A3

DRAWING NO.	REVISION
40320-DR-C-2100	A

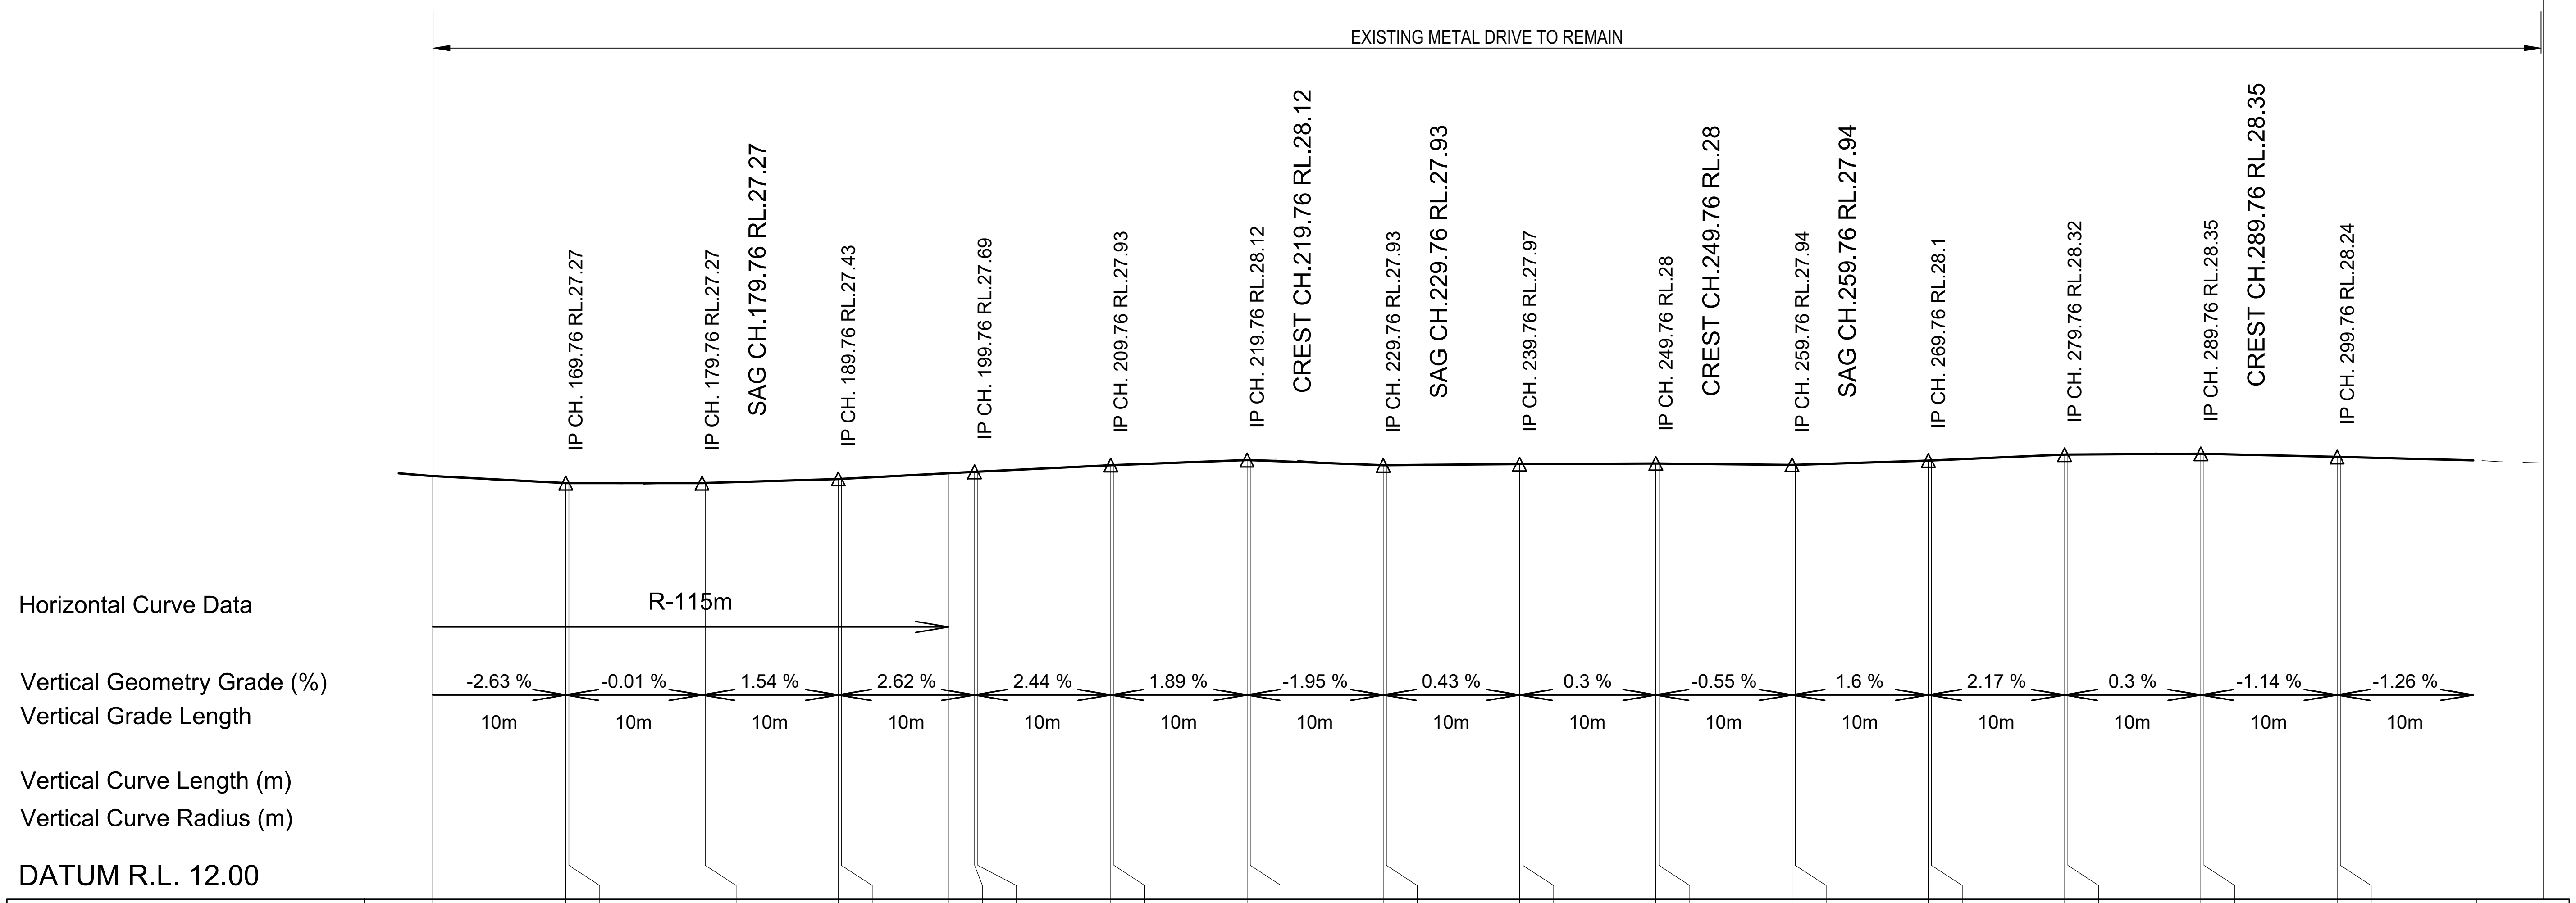

Finished Levels	27.53	27.27	27.27	27.27	27.28	27.43	27.43	27.64	27.69	27.70	27.93	27.94	28.12	28.12	27.93	27.93
Existing Ground	27.53	27.27	27.27	27.27	27.28	27.43	27.43	27.62	27.69	27.70	27.93	27.94	28.12	28.13	27.93	27.93
Cut / Fill Depth	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	-0.00	0.00	-0.00	0.00	-0.01	0.00	-0.00
Chainage	160.00	169.76	170.00	179.76	180.00	189.76	190.00	197.85	199.76	200.00	209.76	210.00	219.76	220.00	229.76	230.00

Finished Levels	27.97	27.97	28.00	28.00	27.94	27.95	28.10	28.11	28.32	28.32	28.35	28.35	28.24	28.23		
Existing Ground	27.97	27.97	28.00	28.00	27.94	27.94	28.10	28.11	28.32	28.32	28.35	28.35	28.24	28.23	28.11	28.02
Cut / Fill Depth	0.00	-0.00	0.00	0.00	0.00	0.01	0.00	-0.00	0.00	-0.00	0.00	-0.00	0.00	-0.00		
Chainage	239.76	240.00	249.76	250.00	259.76	260.00	269.76	270.00	279.76	280.00	289.76	290.00	299.76	300.00	310.00	314.93

LONGITUDINAL SECTION - RIGHT OF WAY - SHEET 2 OF 2

Horizontal Scale 1 : 500
Vertical Scale 1 : 250

CATO BOLAM CONSULTANTS
PLANNERS | SURVEYORS | ENGINEERS | ENVIRONMENTAL

PROJECT
R.C. & D.E. NICKLIN
53B REMIGER ROAD
PUHOI

DRAWING TITLE
PROPOSED RIGHT OF WAY
LONG SECTION
SHEET 2 OF 2

No.	REVISION (DESCRIPTIONS)	NAME	DATE
A	Issued for Engineering Approval	MR	03/05/2019

FOR ENGINEERING APPROVAL

	NAME	DATE
SURVEYED	LD	01/04/2019
DESIGNED	MR	03/05/2019
DRAWN	MR	03/05/2019

DATE 22/05/2019
ORIGINAL SCALE AS SHOWN
ORIGINAL SIZE A3
DRAWING NO. 40320-DR-C-3101
REVISION A

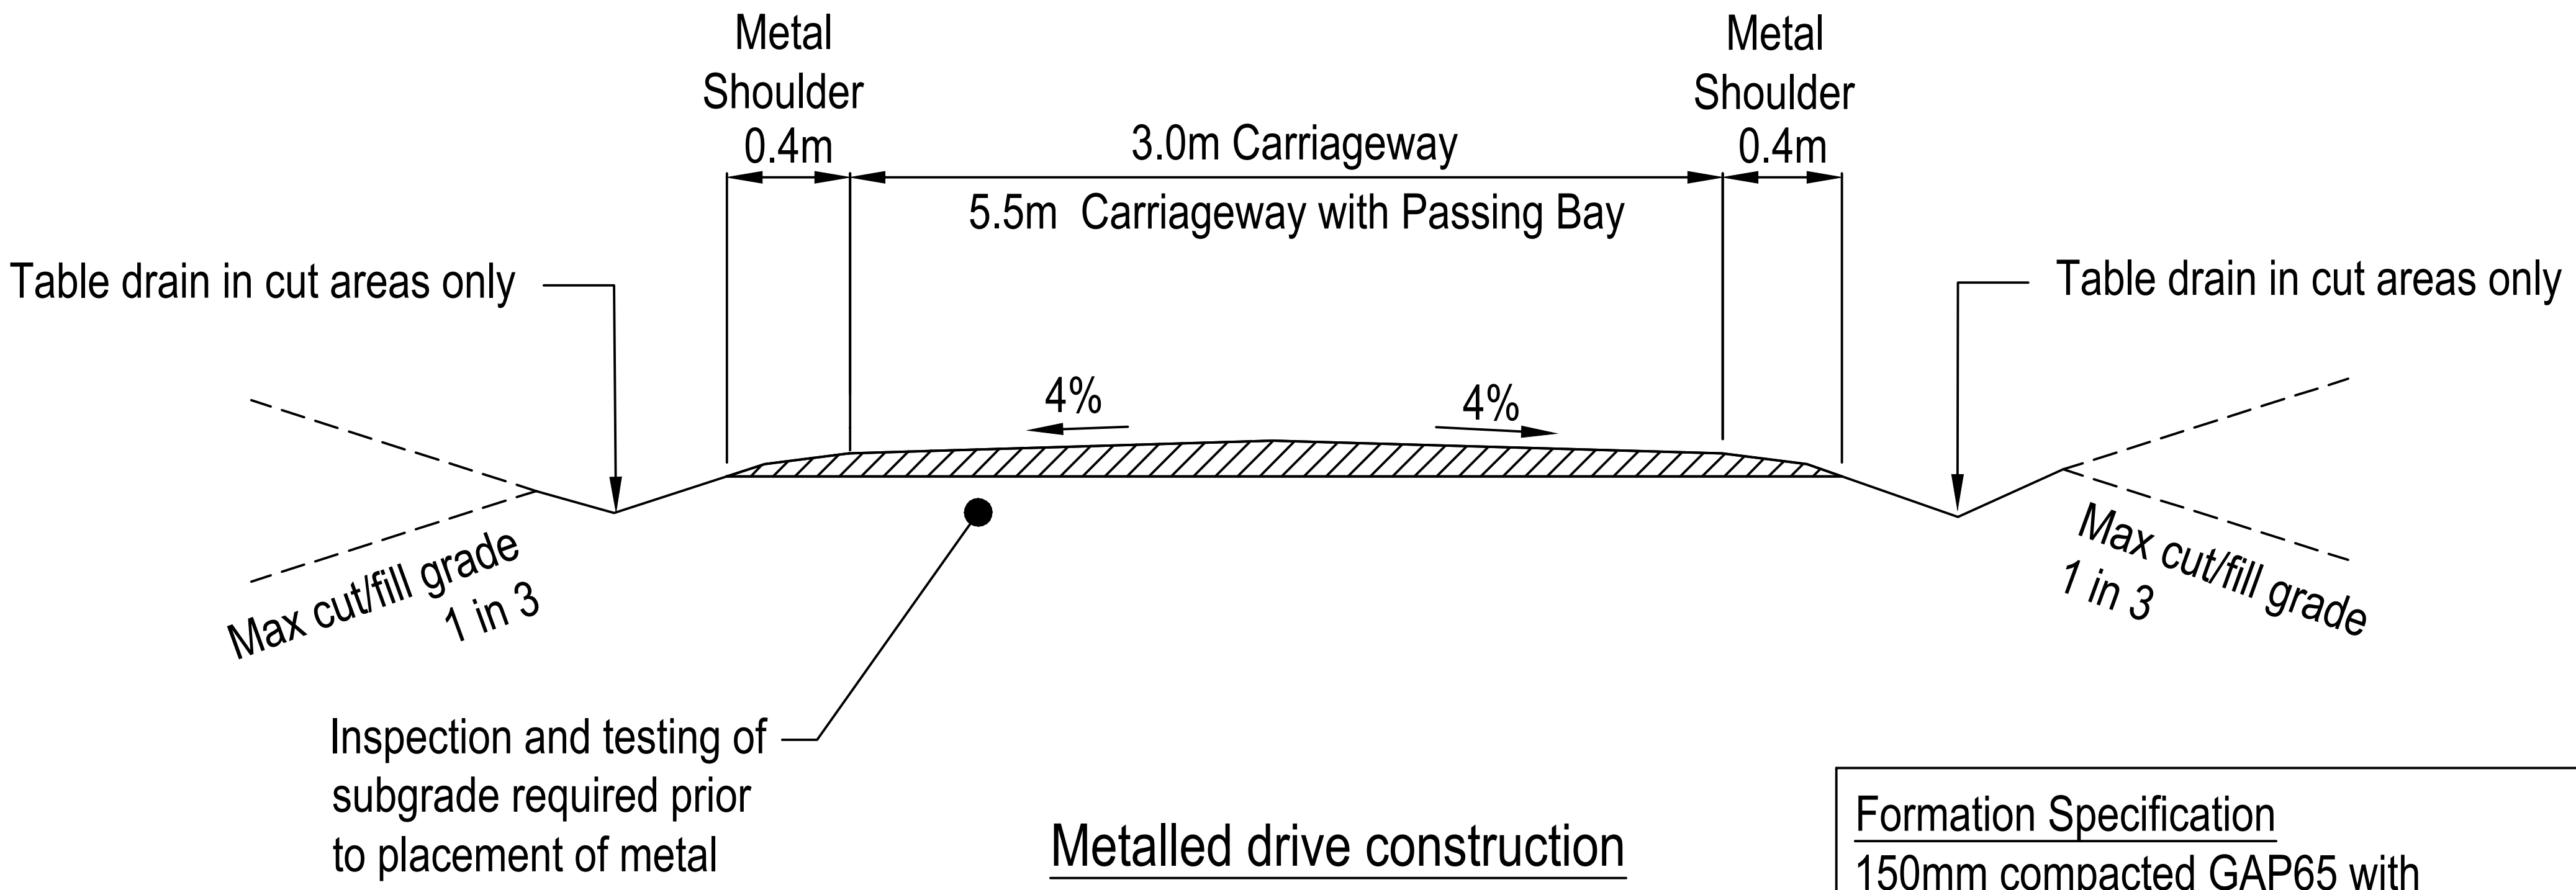

Metalled drive construction
Typical Cross-section (NTS)

Formation Specification
150mm compacted GAP65 with
50mm compacted GAP 20-40 binding layer

NOTES

GENERAL

1. The Contractor shall be responsible for locating all existing services prior to commencement of works. The Contractor shall make good at their own expense any damage to existing services.
2. Levels are in terms of Auckland Vertical Datum 1946.
3. All works are to be installed as per
    - Auckland Transport's Code of Practice "ATCOP".
    - Auckland Council Code of Practice for Land Development and Subdivision - Chapter 4 Stormwater
4. Standard Drawings available from their respective websites or the Engineer.
5. If discrepancies are found between the standards, confirmation shall be sought from the Engineer and supervising council field officer.

DRIVEWAYS

1. Driveways and vehicle crossings to comply with Standard Drawings as required and shall apply through the passing bays.
2. The Engineer must view the subgrade prior to the application of the bedding material.
3. All pavement layers require inspection and approval from the supervising Engineer.

CATO BOLAM
CONSULTANTS
PLANNERS | SURVEYORS | ENGINEERS | ENVIRONMENTAL

PROJECT

R.C. & D.E. NICKLIN
53B REMIGER ROAD
PUHOI

DRAWING TITLE

PROPOSED RIGHT OF WAY
TYPICAL CROSS SECTION

FOR ENGINEERING APPROVAL

No.	REVISION (DESCRIPTIONS)	NAME	DATE
A	Issued fo Engineering Approval	MR	08/05/2019
	SURVEYED	LD	01/04/19
	DESIGNED	MR	01/04/19
	DRAWN	MR	01/04/19

DATE: 08/04/19
ORIGINAL SCALE: NTS
ORIGINAL SIZE: A3
DRAWING NO.: 40320-DR-C-3200
REVISION: A